


TK-UB-5 □型系列玻璃板（管）液位计

TK-UB-5 □ Type Series Glass Plate (Tube) Liquid Level Indicator

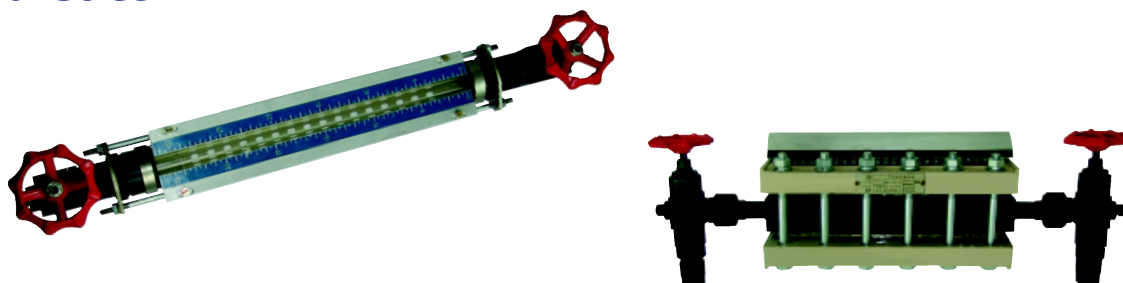

型号名称 Type & Name	TK-UB-5 □型系列玻璃板（管）液位计 TK-UB-5 □ Type Series Glass Plate (Tube) Liquid Level Indicator
结构原理 Configuration Theory	高温耐热玻璃，优质耐热材料 Heat-resistant glass, heat-resistant material of high quality
产品特点 Product Features	结构简单、耐高温、工作可靠 Simple structure, resistant against heat & reliable
被测介质 Tested Medium	液体 Liquid
测量范围 Measuring Range	500~1700mm
测量精度 Measuring Accuracy	6mm
工作温度 Working Temperature	≤ 450℃
工作压力 Working Pressure	≤ 4.0MPa
安装形式 Installation Type	DN20 法兰连接侧装式 DN20 Flange Connection Side-mounted Type
接液材料 Liquid Contact Material	1Cr18Ni9Ti

型号 Type	名 称 Description	用 途 Application
TK-UB-51	透光式玻璃板液位计 Light-penetrable Glass Plate Liquid Level Indicator	一般用于无色透明的液体且光线较好的场合 Generally for colorless & transparent liquid on occasion with bright light
TK-UB-52	透光式带蒸气夹套玻璃板液位计 Light-penetrable Glass Plate Liquid Level Indicator with Vapor-heating Sleeve	在透光式上附有蒸气加热夹套 With vapor-heating sleeve for light-penetrable type
TK-UB-53	反射式玻璃板液位计 Reflection Type Glass Plate Liquid Level Indicator	一般用于有色泽的液体，且光线较好的场合 Generally for colored liquid on occasion with bright light
TK-UB-54	反射式带蒸气夹套玻璃板液位计 Reflection Type Glass Plate Liquid Level Indicator	在反射式上附有蒸气加热夹套 With vapor-heating sleeve for reflection type
TK-UB-55	防霜式玻璃板液位计 Frost-proof Glass Plate Liquid Level Indicator	使用于低温介质附有避免因低温介质造成外表凝霜的装置 With frost-proof device for low-temperature medium
TK-UB-56	照明式玻璃板液位计 Lightening Type Glass Plate Liquid Level Indicator	在透光式上附有照明订装置 With lightening device for light-penetrable type